

BGJ


系列防爆管接头(ⅡC、DIP)



适用范围 Application

- 适用于1区、2区危险场所。
- 适用于ⅡA、ⅡB、ⅡC类爆炸性气体环境。
- Can be used in hazardous areas: Zone 1 and Zone 2.
- Can be used in explosive gas atmospheres of Category IIA、IIB and IIC.

型号含义 Model implication

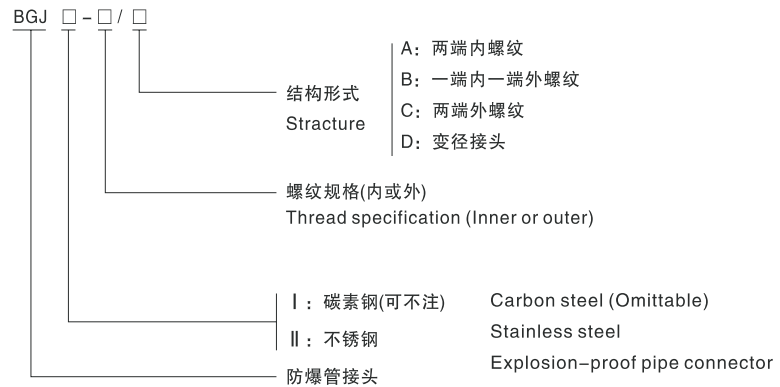

产品特点 Features

- 采用优质碳素钢或不锈钢制成；
- 螺纹规格可根据用户要求，如NPT螺纹，英制及公制等各种非标螺纹。
- The product is made of carbon steel adopting galvanized surface or stainless steel.
- Thread can be specially made, such as thread NPT, metric thread ect.


主要技术参数 Main technical parameters

- 执行标准: GB 3836.1、GB 3836.2、IEC60079
- 防爆标志: Exd Ⅱ C Gb/DIP A20
- Implementing the standard: GB 3836.1、GB 3836.2、IEC60079
- Ex-mark: Exd Ⅱ C Gb/DIP A20


BGJ

Type explosion-proof pipe connector
(II C, DIP)


外形及安装举例 Outline and mounting example

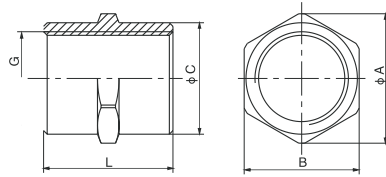

A型 Type

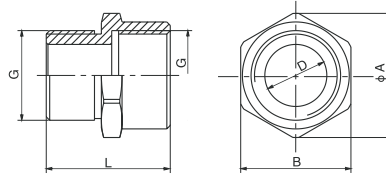

B型 Type

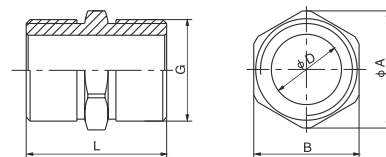

C型 Type


G	L	A	B	C
1/2"	36	30	27	25
3/4"	36	36	32	31
1"	42	42	38	37
1 1/4"	48	52	47	46
1 1/2"	48	60	55	54
2"	54	70	66	65
2 1/2"	54	88	83	82
3"	60	100	95	94
4"	60	127	122	121

G	L	A	B	C
1/2"	40	30	27	13
3/4"	40	36	32	18
1"	48	42	38	24
1 1/4"	48	52	47	32
1 1/2"	48	60	55	38
2"	54	70	66	50
2 1/2"	54	88	83	65
3"	60	100	95	75
4"	60	127	122	100

G	L	A	B	C
1/2"	40	25	22	13
3/4"	40	30	27	18
1"	48	40	35	24
1 1/4"	48	50	45	32
1 1/2"	48	58	52	38
2"	54	67	62	50
2 1/2"	54	85	80	65
3"	60	98	93	75
4"	60	125	120	100

BGJ

系列防爆管接头(ⅡC、DIP)

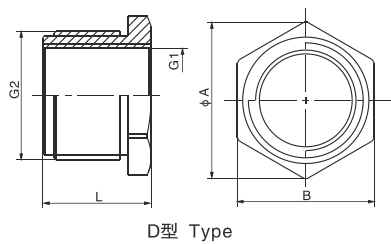

G1	G2	A	B	L
1/2"	3/4"	31	27	25
3/4"	1"	41	36	28
1"	1 1/4"	50	45	30
1 1/4"	1 1/2"	55	50	30
1 1/2"	2"	70	65	32
2"	2 1/2"	85	80	35
2 1/2"	3"	100	94	36
3"	4"	125	120	36